




HYDRAULIC COMPACTOR TPC Series

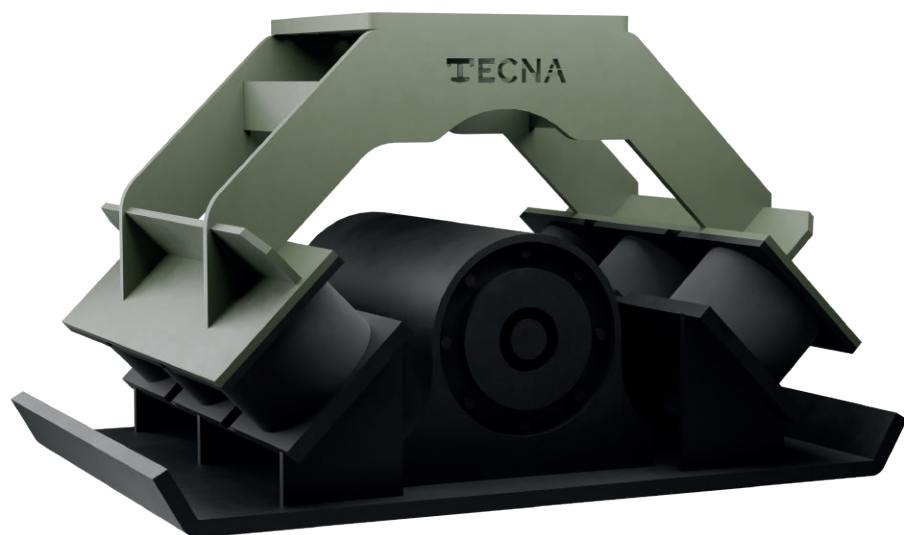

IT

Motore idraulico con valvola di sovrappressione: per un funzionamento sicuro e la protezione del sistema.

Piastra ad alta resistenza: piastra di compattazione realizzata in materiale antiusura.

EN

Hydraulic Motor with Relief Valve: for safe operation and system protection.

High-Resistance Plate: Compaction plate made from anti-wear material.

FR

Moteur hydraulique avec soupape de décharge: pour une utilisation en toute sécurité et la protection du système.

Plaque haute résistance: plaque de compactage en matériau anti-usure.

DE


Hydraulikmotor mit Überdruckventil: für sicheren Betrieb und Systemschutz.

Hochbeständige Platte: Verdichtungsplatte aus verschleißfestem Material

ES

Motor hidráulico con válvula de seguridad: Para operaciones mas seguras.

Placa de alta Resistencia: Placa fabricada con material anti desgaste.

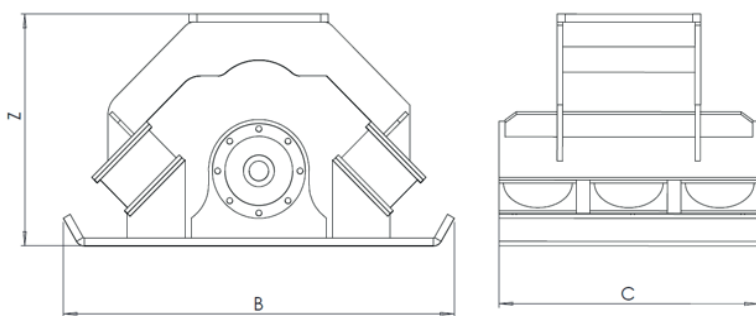

	TPCMINI		TPC02		TPC04		TPC06		TPC08	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
Z	423	16.7	491	19.3	680	26.8	840	33.1	950	37.4
B	733	28.9	921	36.3	1033	40.7	1160	45.7	1250	49.2
C	300	11.8	400	15.7	460	18.1	700	27.6	900	35.4

ITALIANO	ENGLISH	DEUTSCH	FRANÇAIS	ESPAÑOL	TPCMINI		TPC02		TPC04		TPC06		TPC08		UNIT
PESO ESCAVATORE	SUITABLE EXCAVATOR	GEEIGNET FÜR TRÄGERGERÄT	POIDS PELLE	PESO EXCAVADORA	1	÷ 3	4	÷ 6	6	÷ 9	10	÷ 17	18	÷ 25	Ton
PESO MEDIO OPERATIVO	OPERATING WEIGHT	EINSATZGEWICHT DES VERDICHTERS	POIDS OPÉRATIF	PESO MEDIO OPERATIVO	150		280		300		600		850		kg
PRESSIONE DI LAVORO	WORKING PRESSURE	BETRIEBSDRUCK	PRESSION DE SERVICE	PRESION DE TRABAJO EN EL ACCESORIO	100	÷ 180	100	÷ 200	100	÷ 200	150	÷ 170	160	÷ 180	bar
FORZA COMPATTATRICE	COMPACTION FORCE	VERDICHTERKRAFT	FORCE DE COMPACTAGE	FUERZA DE COMPACTACIÓN	20		30		40		65		150		kN
DIMENSIONI PIASTRA	PLATE DIMENSIONS	PLATTENGROSSE	DIMENSIONS DE LA PLAQUE	TAMAÑO DE LA PLACA	733	x 300	921	x 400	1033	x 460	1160	x 700	1250	x 900	mm
FREQUENZA VIBRANTE	VIBRATION FREQUENCY	SCHWINGFREQUENZ	FRÉQUENCE DE VIBRATION	FRECUENCIA VIBRATORIA	2000		2000		2000		###		2000		n/min
PORTATA OLIO	OIL SUPPLY	ÖLBEDARF	DÉBIT D'HUILE	CAUDAL	30	÷ 60	40	÷ 120	45	÷ 120	85	÷ 105	120	÷ 170	l/min